



EXPOSED FASTENING SYSTEMS

PERMA-CLAD®




The Perma-Clad® panel system can be used for both roof and wall applications. Perma-Clad® is great for residential, light commercial, agricultural and storage buildings and also for canopies. The Perma-Clad® panel must be installed over a solid, waterproofed deck when used as a roof panel.

Features and Benefits:

- UL 580 rating is available, as well as UL 790, Class A for external fire, roof assembly for UL 263 for internal fire and the UL 2218 Class 4 impact rating.

Product Specifications

- **Applications:** Roof and Wall
- **Coverage Widths:** 36"
- **Rib Spacing:** 9" on center
- **Rib Height:** 5/8"
- **Minimum Slope:** 3:12
- **Panel Attachment:** Exposed Fastening System
- **Gauges:** 29 (standard); 26 (optional)
- **Finishes:** Smooth (standard);
- **Coatings:** Galvalume Plus®, Signature® 200

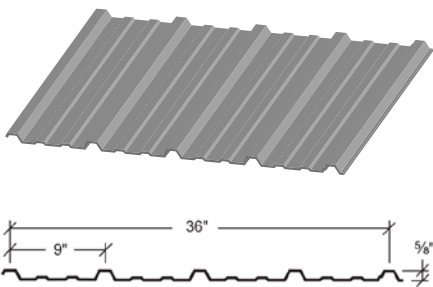

Descriptions and specifications contained herein were in effect at the time this publication was approved for printing. In a continuing effort to refine and improve products, MBCI reserves the right to discontinue products at any time or change specifications and/or designs without incurring obligation. To ensure you have the latest information available, please inquire or visit our website at www.mbc.com. Application details are for illustration purposes only and may not be appropriate for all environmental conditions, building designs or panel profiles. Projects should be designed to conform to applicable building codes, regulations and accepted industry practices. If there is a conflict between this manual and project erection drawings, the erection drawings will take precedence. MBCI's insulated metal panel product line is manufactured by Metl-Span®. © 2020 MBCI®, part of the Cornerstone Building Brands family. All rights reserved. 0706209991132/RevA/MS/0720